




ANATECH MICROWAVE COMPANY




Manufacturer & Supplier of RF & MW Filters



Wimax Monoblock Ceramic Bandpass Filter Part Number: AM3285B1001

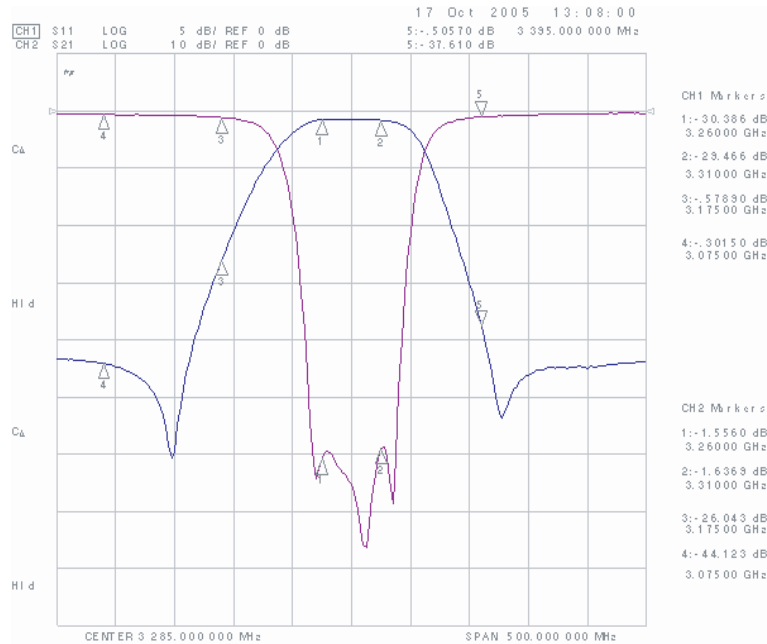

Center Frequency:	3285MHz
Pole:	4
Bandwidth:	Fo +/-25MHz
Insertion Loss in BW:	2 dB max
Ripple in BW:	0.5dB max
Return Loss in BW:	18dB min
Attenuation:	30dB min @ 3075MHz 10dB min @ 3175MHz 10dB min @ 3395MHz 28dB min @ 3495MHz
In/Out Impedance:	50 ohm

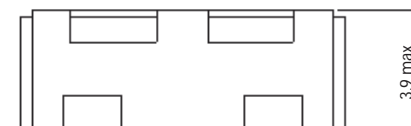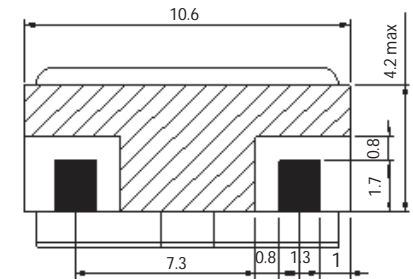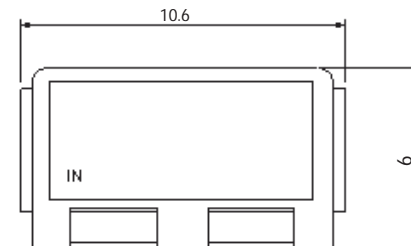

■ :I/O PORT
 ▨ :GROUND
 TOLERANCE UNLESS
 OTHERWISE SPECIFIED : ± 0.3
 UNITS : mm