




# ANATECH MICROWAVE COMPANY




## Manufacturer & Supplier of RF & MW Filters



### Wimax Monoblock Ceramic Bandpass Filter Part Number: AM3335B1002

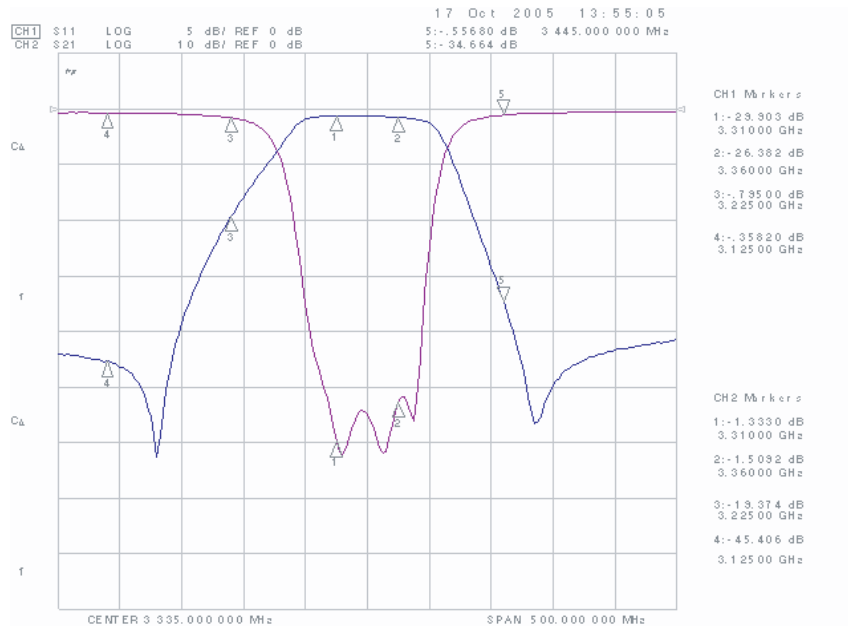

Center Frequency:	3335MHz
Pole:	4
Bandwidth:	Fo +/-25MHz
Insertion Loss in BW:	2 dB max
Ripple in BW:	0.5dB max
Return Loss in BW:	18dB min
Attenuation:	30dB min @ 3125MHz 10dB min @ 3225MHz 10dB min @ 3445MHz 28dB min @ 3545MHz
In/Out Impedance:	50 ohm

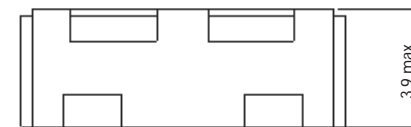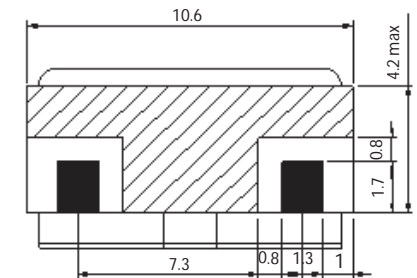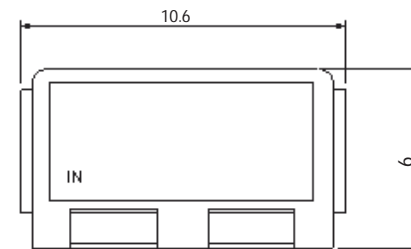

■ :I/O PORT  
 ▨ :GROUND  
 TOLERANCE UNLESS OTHERWISE SPECIFIED : ± 0.3  
 UNITS : mm