




# ANATECH MICROWAVE COMPANY




## Manufacturer & Supplier of RF & MW Filters



### Wimax Monoblock Ceramic Bandpass Filter Part Number: AM3425B1003

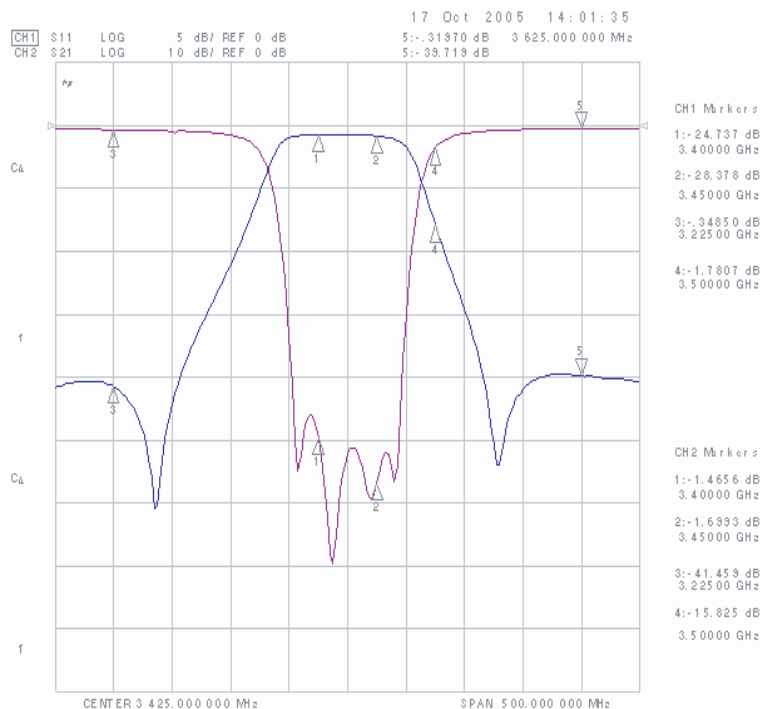

Center Frequency:	3425MHz
Pole:	4
Bandwidth:	Fo +/-25MHz
Insertion Loss in BW:	2 dB max
Ripple in BW:	0.5dB max
Return Loss in BW:	18dB min
Attenuation:	25dB min @ 3225MHz 8dB min @ 3500MHz 25dB min @ 3625MHz
In/Out Impedance:	50 ohm

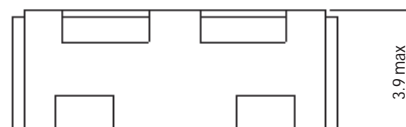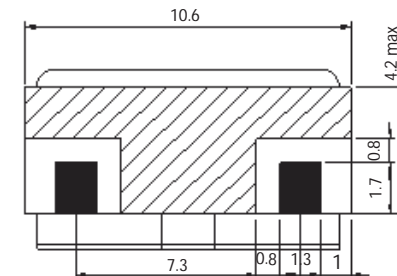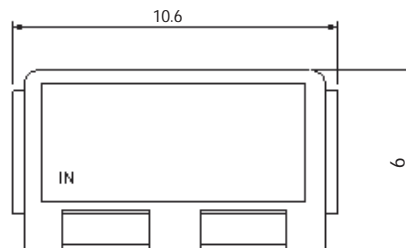

■ :I/O PORT  
 ▨ :GROUND  
 TOLERANCE UNLESS  
 OTHERWISE SPECIFIED : ± 0.3  
 UNITS : mm