




ANATECH MICROWAVE COMPANY




Manufacturer & Supplier of RF & MW Filters



Wimax Monoblock Ceramic Bandpass Filter Part Number: AM3475B1005

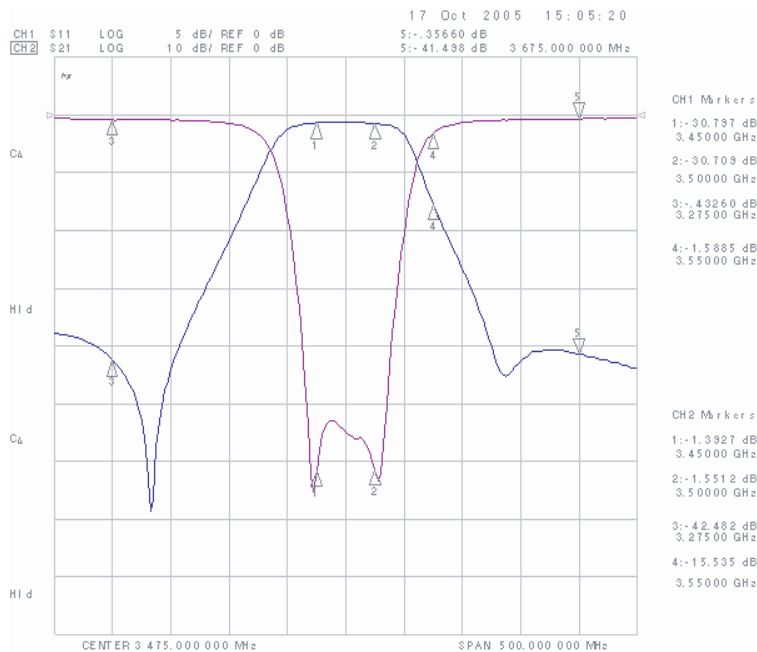

Center Frequency:	3475MHz
Pole:	4
Bandwidth:	Fo +/-25MHz
Insertion Loss in BW:	2 dB max
Ripple in BW:	0.5dB max
Return Loss in BW:	18dB min
Attenuation:	25dB min @ 3275MHz 8dB min @ 3550MHz 25dB min @ 3675MHz
In/Out Impedance:	50 ohm

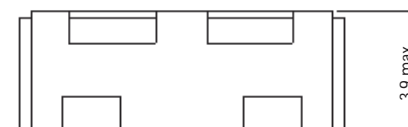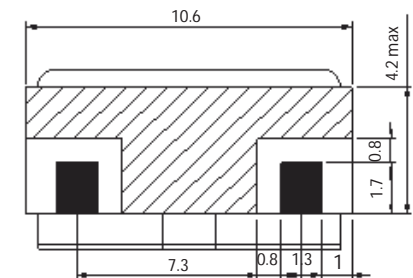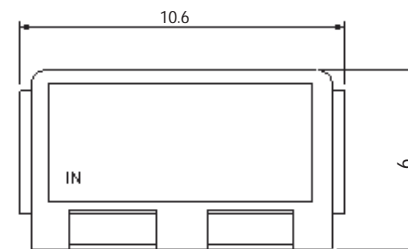

:I/O PORT
 :GROUND
 TOLERANCE UNLESS
 OTHERWISE SPECIFIED : ± 0.3
 UNITS : mm